

Miniature Bi-Pin Lampholders



1670 Series Butt-on, Flush or Surface Mount

1670 Series sockets are now compatible with the new generation of higher voltage, high performance T5 lamps. Kulka's wide variety of mounting options allow for flexible design of fixtures.

Specifications

Rating: 75 Watts, 600 V

Listing: UL File No. E-13408; CSA File No. LR95423

Mounting: Butt-on or a variety of brackets

Materials:

Housing: White engineering grade thermoplastic

Contacts: Copper alloy, surface wipe configuration

Termination: "Wire fast" terminals for No. 18 AWG stranded (twisted, tinned and solder dipped or fused) or No. 18 AWG solid copper wire with 3/8" strip length.

Special: Item can be factory wired per customer specifications for length, strip and wire material.

Brackets: Cold rolled steel, zinc plated. (.032" thick except BR5, BR7, BR8 and BR32) unless otherwise noted.




1670 Series



Back to Back Spacing

Nominal lamp length plus 9/64" ± 1/64"

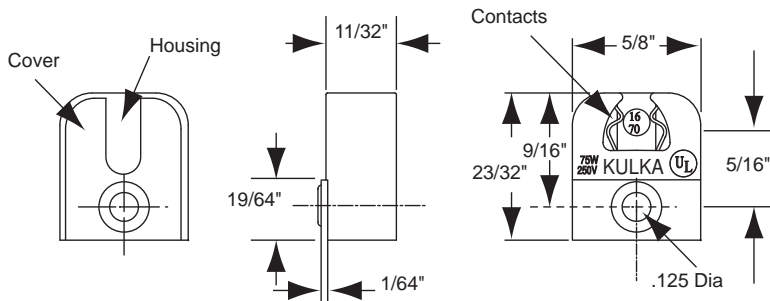

Kulka® 1670 Series

Part No.	Description
1670	Butt-on, wire fast terminals, .125" dia. clearance hole
1670.BR1	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 1.
1670.BR2	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 2.
1670.BR4	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 4.
1670.BR5	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 5.
1670.BR6	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 6.
1670.BR7	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 7.
1670.BR8	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 8.
1670.BR14	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 14.
1670.BR15	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 15.
1670.BR21	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 21.
1670.BR23	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 23.
1670.BR25	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 25.
1670.BR30	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 30.
1670.BR32	Butt-on, wire fast terminals, .125" dia. clearance hole, bracket No. 32.

Packed 500/ box. No. 4/36 x 3/8" screws supplied in bulk (p/n: 8043.612.002)

Specials: Item can be factory wired per customer specifications as to length, strip and wire material

Suggested Wiring Material: 18 gauge stranded wire with 3/8" Strip length or 18 gauge solid wire with 3/8" Strip length.

1670 Series Miniature Bi-Pin Lampholder Mounting Brackets

